



GINLONG

No. 57 Jintong Road,
Binhai (Sea front) Industrial Park,
Xiangshan, Ningbo, Zhejiang, 315712, P.R.China
Tel: (+86) 574 6578 1806 Fax: (+86) 574 6578 1606
E-Mail: info@Ginlong.com

G100 Declaration of Conformity

Manufacturer: Ginlong Technologies Co., Ltd.

Address: No.57 jintong Road,Seafrent(Binhai)Industrial park,Xiangshan Demonstration Industrial Estate,Xiangshan,Ningbo,Zhejiang,315712,P.R.China

Product: Grid-connected PV Inverter

Model: Solis-25K-5G; Solis-30K-5G; Solis-33K-5G; Solis-36K-5G; Solis-40K-5G;
S5-GC25K; S5-GC30K; S5-GC33K; S5-GC36K; S5-GC40K;

Use in accordance with regulations:

Technical Guidance for Customer Export Limiting Schemes G100 for photovoltaic systems with a three-phase parallel coupling via an inverter in the public mains supply.

Applied rules and standards :

The result according to G100 engineering recommendation.

The safety concept of an aforementioned representative product complies at the time of issue of this certificate of valid safety specifications for the specified use in accordance with G100 recommendations.Compliant with BSEN 61000-3-12

Certificate Number: ERD-CR202112001

Date: 2021-12-1

Manufacture Stamp

Date and place

Ningbo

2021-12-1

Caojiayi


锦浪科技股份有限公司
GINLONG TECHNOLOGIES CO.,LTD.



GINLONG

No. 57 Jintong Road,
 Binhai (Sea front) Industrial Park,
 Xiangshan, Ningbo, Zhejiang, 315712, P.R.China
 Tel: (+86) 574 6578 1806 Fax: (+86) 574 6578 1606
 E-Mail: info@Ginlong.com

System Connecton Diagram

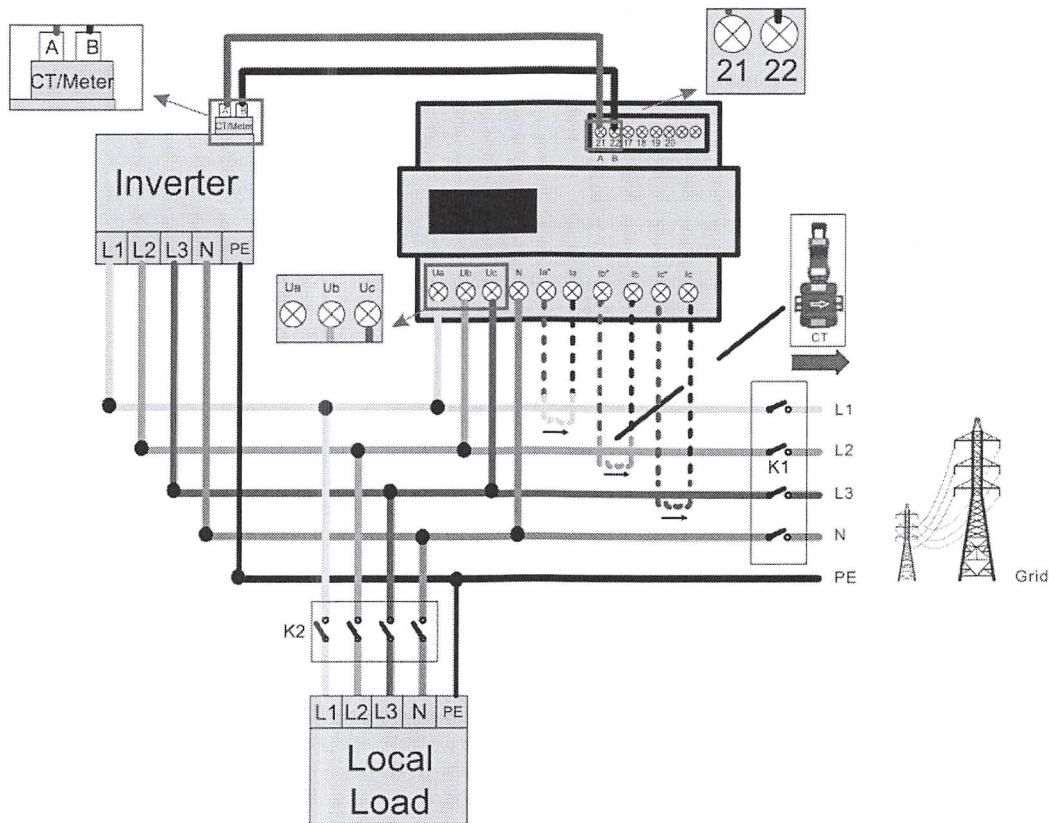

Setting Protection Test

Requirement	Result	Note
The settings is password protected, and cannot be changed by anyone other than got written agreement of the DNO;	Pass	

Fail Safe Test

Method: Set 0% export limit, implement the test before start or in running

Criteria: Fall time is less than 5s, the inverter's output active power is less than set limit. After fail safe test , disconnect AC, the reconnect time delay is fault reconnect time.

No	Component	Test	Active Power	Response Time	Fall Time	Reconnect time	Pass /Fail	Comments
1	Remove CT	Remove CT	0W	1.3S	3.20S	34.8	Pass	NA
		Disconnect CT Cable	0W	1.4S	3.2S	35.5	Pass	NA
2	Power	Remove	0W	1.5S	3.24S	34.2	Pass	NA



GINLONG

No. 57 Jintong Road,
Binhai (Sea front) Industrial Park,
Xiangshan, Ningbo, Zhejiang, 315712, P.R.China
Tel: (+86) 574 6578 1806 Fax: (+86) 574 6578 1606
E-Mail: info@Ginlong.com

	Monitoring Unit(PMU)	Power supply to PMU						
3	Control Unit(CU)	Remove Power supply to any CU	0W	1.2S	3.42S	34.6	Pass	NA
4	Generator Interface units(GIU)	Remove Power supply to all GIUs	NA	NA	NA	NA	NA	NA
5	Demand control unit(DCU)	Remove Power supply to all DCU	NA	NA	NA	NA	NA	NA
6	Network hub/switches	Remove Power supply	NA	NA	NA	NA	NA	NA
7	PMU →CU communication cable	Unplug cable	0W	1.2S	3.2S	34.2	Pass	NA
8	CU →GIU communication cable	Unplug cable(repeat where additional GIU units)	NA	NA	NA	NA	NA	NA
9	GIU→ communication cable	Unplug cable(repeat where additional GIU units)	NA	NA	NA	NA	NA	NA
10	CU →DCU communication cable	Unplug cable(repeat where additional	NA	NA	NA	NA	NA	NA



GINLONG

No. 57 Jintong Road,
 Binhai (Sea front) Industrial Park,
 Xiangshan, Ningbo, Zhejiang, 315712, P.R.China
 Tel: (+86) 574 6578 1806 Fax: (+86) 574 6578 1606
 E-Mail: info@Ginlong.com

		1 DCU units)						
11	DCU→ Load communication cable	Unplug cable(repeat where additional 1 DCU units)	NA	NA	NA	NA	NA	NA
12	Controlled Load(s)	Turn off load (e.g. active thermostat)	NA	NA	NA	NA	NA	NA

NOTE: "Fail safe tests are not required at installations where all of the **Generating Units** are **Type Tested SSEGs**, with a **Power Station Capacity** of not more than 7.36kW per phase (i.e.32A per phase at 230V) and an **Export Capacity** of not more than 3.68kW per phase (i.e.16A per phase at 230V)."

Power Limit Test

Method: Set export limit, implement the test before start, then start the inverter.

Criteria: fall time is less than 5s, the inverter's export active power is less than limit power.

0%export limit [% Inverter Rating]					
Input		Input supply [% Inverter Rating]			
Load	Export/Time	25%	50%	75%	100%
Load [%Inverter Rating]	0%	801W/3.05S	804W/3.00S	806W/3.20S	804W/2.22S
	25%	NA	803W/2.94S	808W/3.14S	810W/2.18S
	50%	NA	NA	802W/3.15S	806W/2.24S
	75%	NA	NA	NA	803W/2.16S
25%export limit [% Inverter Rating]					
Input		Input supply [% Inverter Rating]			
Load	Export/Time	25%	50%	75%	100%
Load [% Inverter Rating]	0%	NA	9904W/2.21S	9906W/2.43S	9906W/2.38S
	25%	NA	NA	9900W/2.40S	9903W/2.26S
	50%	NA	NA	NA	9904W/2.16S
	75%	NA	NA	NA	NA
50%export limit [% Inverter Rating]					
Input		Input supply [% Inverter Rating]			
Load	Export/Time	25%	50%	75%	100%
Load [% Inverter Rating]	0%	NA	NA	19882W/1.92S	19894W/2.04S
	25%	NA	NA	NA	19892W/2.12S
	50%	NA	NA	NA	NA



GINLONG

No. 57 Jintong Road,
Binhai (Sea front) Industrial Park,
Xiangshan, Ningbo, Zhejiang, 315712, P.R.China
Tel: (+86) 574 6578 1806 Fax: (+86) 574 6578 1606
E-Mail: info@Ginlong.com

Rating]	75%	NA	NA	NA	NA
75%export limit [% Inverter Rating]					
	Input	Input supply [% Inverter Rating]			
Load Export/Time		25%	50%	75%	100%
Load	0%	NA	NA	NA	29725W/1.82S
[%Inverter Rating]	25%	NA	NA	NA	NA
	50%	NA	NA	NA	NA
	75%	NA	NA	NA	NA

Comment

The test result is based on S5-GC40K. All the series of inverters control command are the same. So the test result can cover all series.

Note: normally, this inverter does not actively output power to the distribution network.